



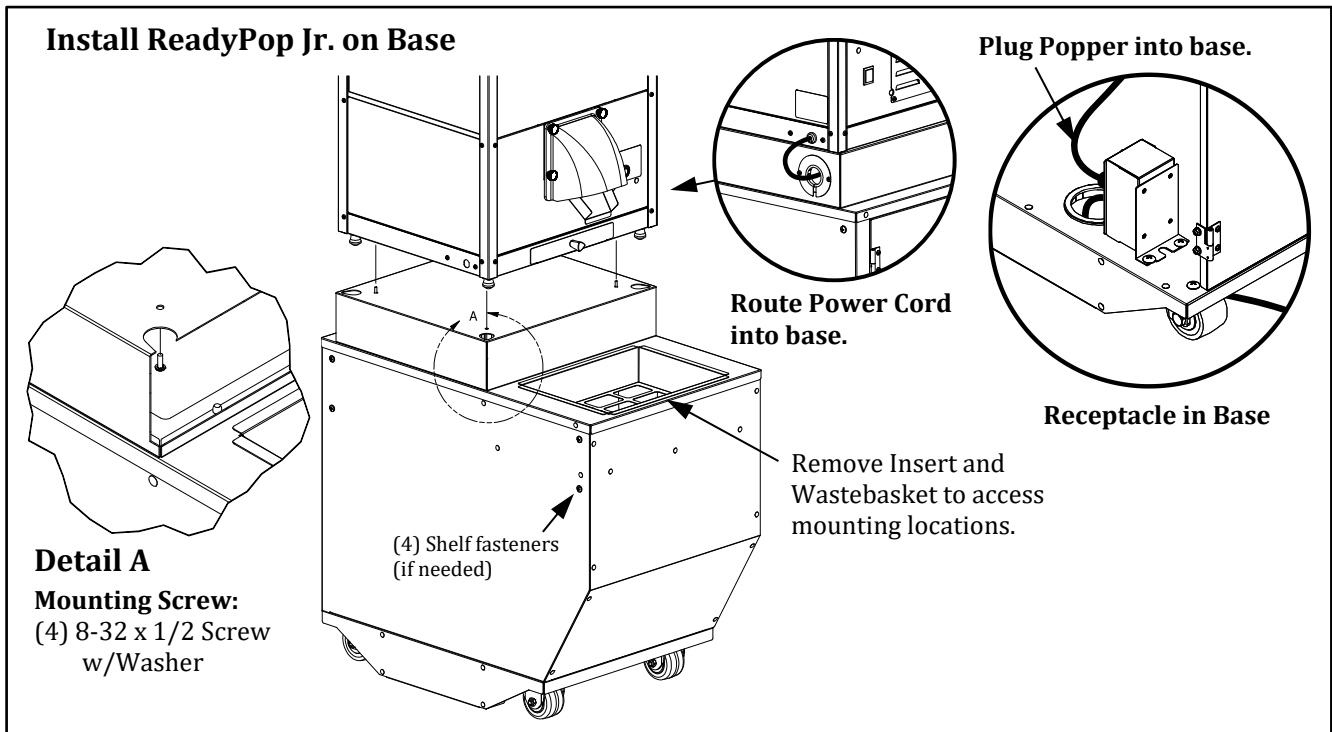

ReadyPop[®] Jr. Optional Mounting on a 2793 ReadyPop[®] Jr. Base

ReadyPop Jr. unit must be off, unplugged and completely cooled before installing it on a base. Reference the Instruction Manual for the ReadyPop Jr. unit for Safety, Electrical Requirements, and Operating instructions.

1. Base must be unplugged.
2. Position base on a level surface and lock the caster wheels into place.
3. Remove wastebasket from base (see image).
4. Set ReadyPop Jr. on base—position popper so debris bin is under the dispenser and place feet into holes provided, see image below.
5. Fasten unit to base—insert a screw w/washer up through the hole in the base, and into the popper until snug. Repeat for each corner, then tighten all 4 screws to secure.
6. Route the popper's power cord into the base, see image below. Reference the Electrical Requirements section to plug in the power cord from the base.
7. Attach Shelf Option (PN 121014), if applicable (option sold separately), see next page.
8. Reinstall wastebasket and insert before use.

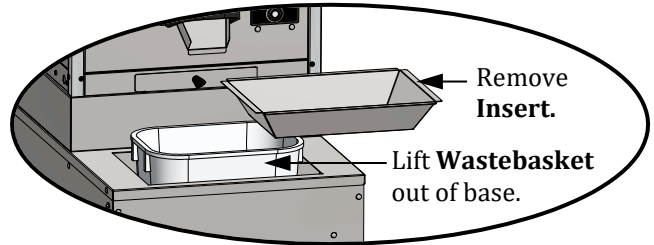



Optional Shelf for 2793 ReadyPop® Jr. Base

Part No. 121014 (sold separately)


Installation Instructions

The optional Shelf (PN 121014, one Shelf) fits either side of a 2793 ReadyPop Jr. Base (all items sold separately).



2793 Base, (2) Shelf Options, and ReadyPop Jr. shown assembled above for reference only (all items sold separately).

1. Turn popper unit OFF and allow it to cool.
2. Unplug the base/popper from the power supply.
3. Remove the insert and wastebasket from the base.
4. Remove the (4) screws from side of base to hold the shelf, see image below (shelf fits either side), see section view below.

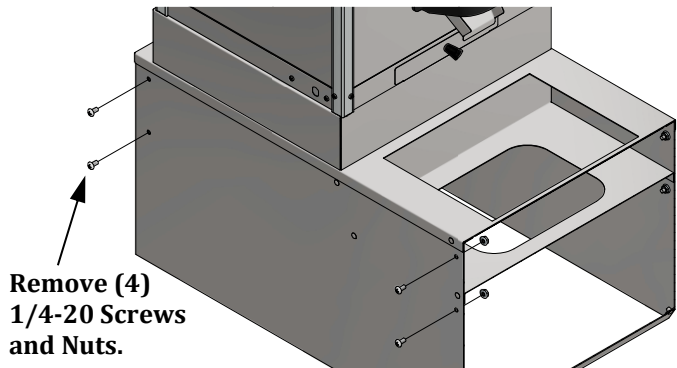

4. Use screws and nuts removed to fasten shelf to base (see image below)—(4) screws/nuts are required for each shelf.
5. Repeat for other side, if applicable.
6. Reinstall wastebasket and insert for use.



Shelf Installed View